

Reliability improvement of the evacuation route of fuel elements of Phénix

DE LA RECHERCHE À L'INDUSTRIE



F. DOMINJON, H. DUPORT, F. LAURENT

www.cea.fr




INTRODUCTION

- PHENIX is a French fast breeder nuclear power plant which went critical in 1973 and ceased power operation in 2009.
- The decommissioning project started in 2005, in order to start immediately after the final shutdown and achieve the dismantling operations as soon as possible in accordance to the French Safety Authorities principals.
- The critical path of the plant dismantling is the evacuation of the fuel elements and after the evacuation of the Lateral Neutron Shielding Assemblies (LNSA).
- The “Commissariat à l’Energie Atomique et aux Energies Alternatives” (CEA) is the PHENIX operator. The decommissioning project is headed by the CEA.

STATEMENT

- The evacuation of the fuel elements and of the lateral neutron shielding assemblies uses the same route to get out of the plant. This way, called handling route, needs the availability of several equipments, mainly handling equipments.
- This handling route has been used around 1800 times already. It will be used around 1600 additional times till the end of evacuation. So this handling route is only at half of its life.
- The schedule of evacuation is planned for five years for fuel assembly and 7 years for LNSA. This schedule is based on two teams per day and a reliability of 80% of the handling route.


Reliability improvement of the evacuation route of fuel elements of Phénix

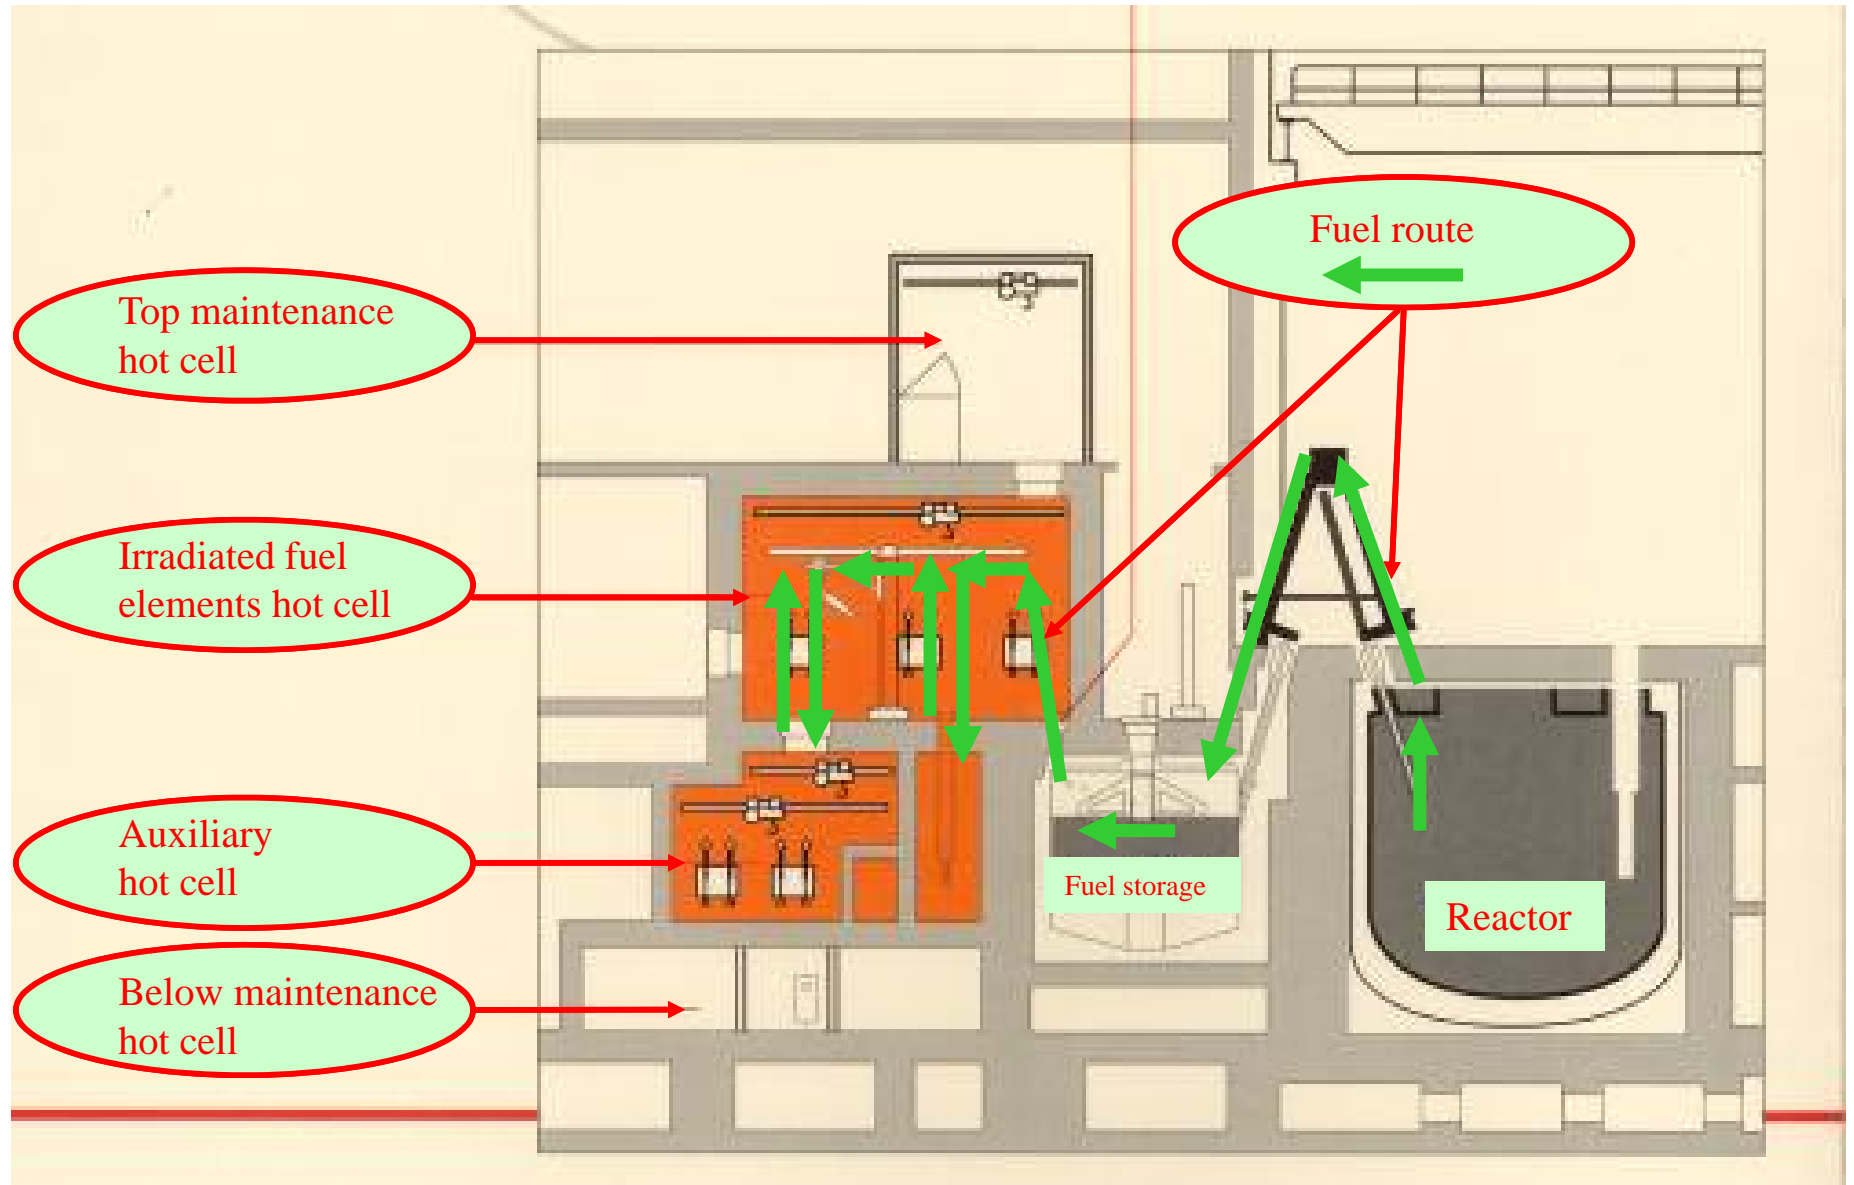

STATEMENT

- In 2009, the main crane of the hot cell of the handling route broke down (presented in HOTLAB 2013); in 2010 the heavy manipulator in the cell failed too (presented in HOTLAB 2014), other equipments may face problems. Crane and heavy manipulator failure and replacement stopped the evacuation during around 3 years.
- The reliability of the handling route is estimated at 50% of availability (80% needed).

Reliability improvement of the evacuation route of fuel elements of Phénix

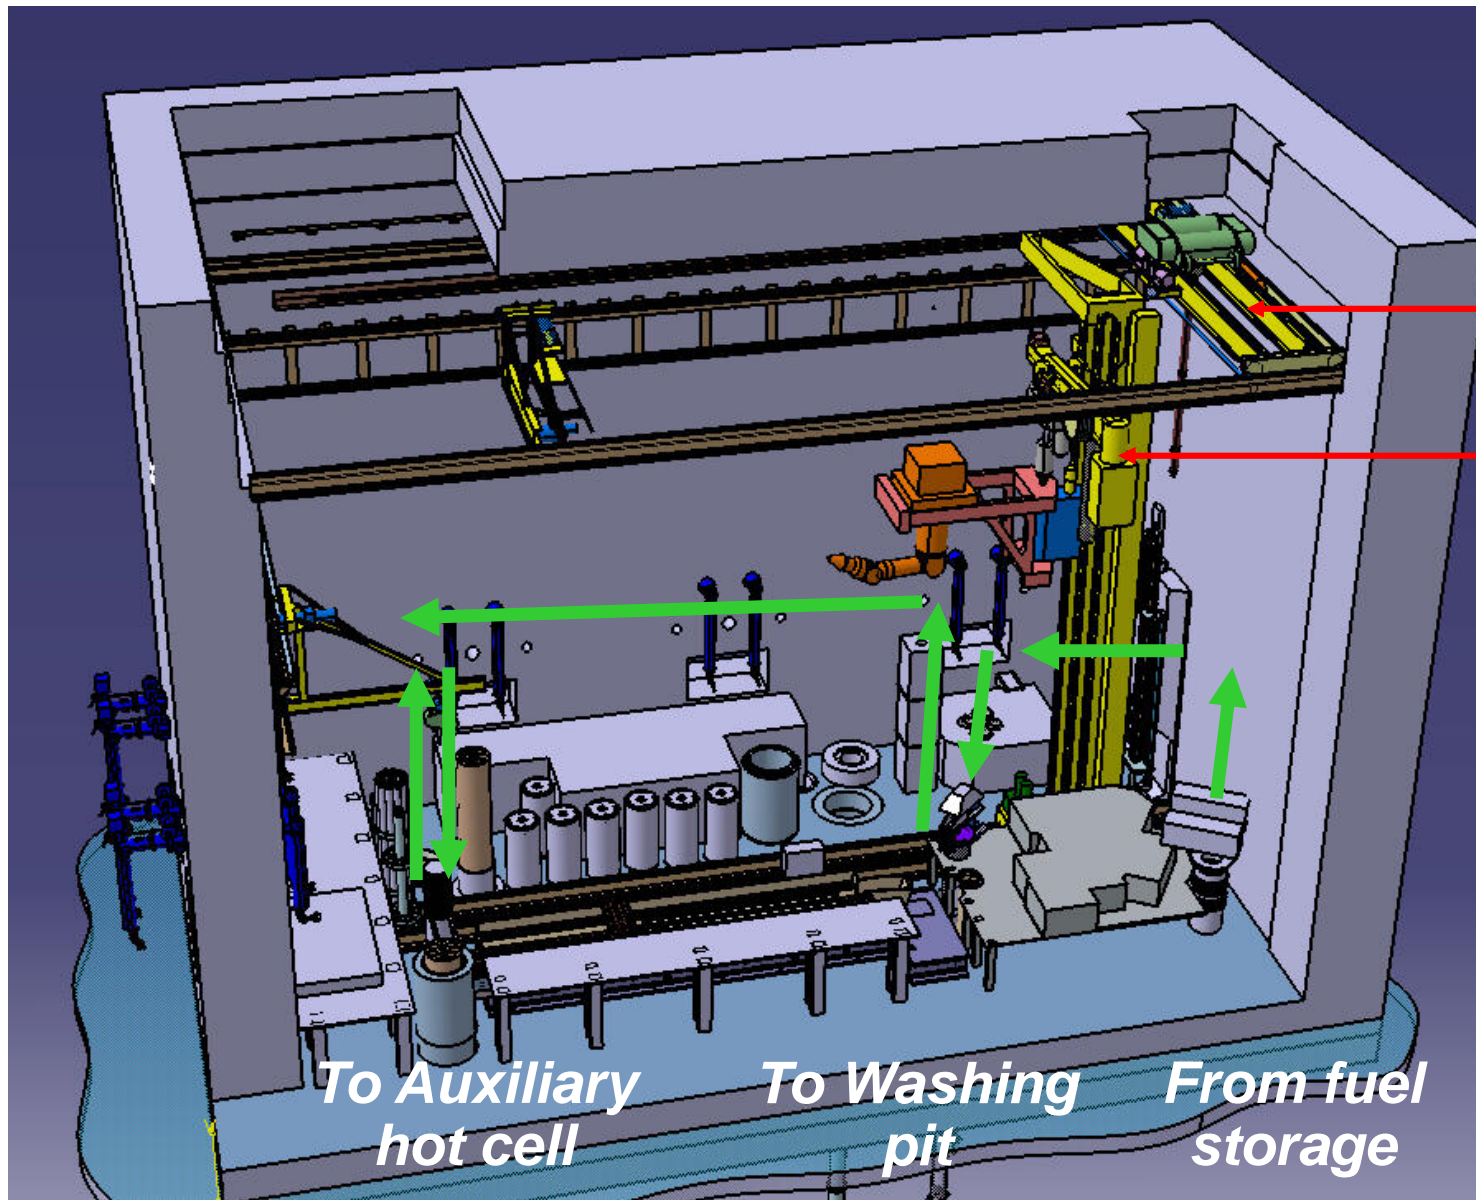

Irradiated fuel elements hot cell

Replaced in 2012

Main Lifting Unit
HOTLAB 2013

Heavy Manipulator
HOTLAB 2014

To Auxiliary
hot cell

To Washing
pit

From fuel
storage

ROADMAP

- In 2013 a working group was created to analyze the handling route and specify a roadmap.
- The work was done in 2 steps:
 - ❖ First step analysis of the concerned equipments. It consists of inventory of the concerned equipments, documentary statement, maintenance and operation feedback, technical analysis of the reliability problems,
 - ❖ Second step definition of an action plan. It consists of the best solution determination according to the cost, technique and schedule.

ROADMAP

- For each equipment, the adopted analysis approach identifies 3 types of breakdown
 - ❖ Standard failure possible to be repaired with the existing means,
 - ❖ Blocking failure which needs new means to come back in operation and a long loss of operating time,
 - ❖ Aggravating factor, the failure leads to a non-safety position.

RESULTS

- 47 equipments are linked to the handling route.
- The first step of analyze shows two main causes of possible failure:
 - ❖ Old age especially for the electrical part,
 - ❖ Low maintenance.
- The end of first step defines 16 equipments to be treated in priority due to the important impact of their failure on availability and safety.

RESULTS

- To increase the reliability of each equipment, 3 main methods have been analyzed:
 - ❖ Optimization of the maintenance (procedure, spare part ...),
 - ❖ Refurbishing (simple or important),
 - ❖ Replacement (partial or total).

- The second step analyzes these different solutions according to
 - ❖ cost,
 - ❖ Interruption of operations (due to a blocking failure or to the reliability work)
 - ❖ Taking into account the difficulties of realization (assembly on site, qualification, dust...).

Reliability improvement of the evacuation route of fuel elements of Phénix

Top maintenance hot cell


Replacement planned in 2016

Main Lifting Unit
Partial replacement

Plug Lifting Trolley
Important refurbishing

Irradiated fuel elements hot cell

Reliability improvement of the evacuation route of fuel elements of Phénix

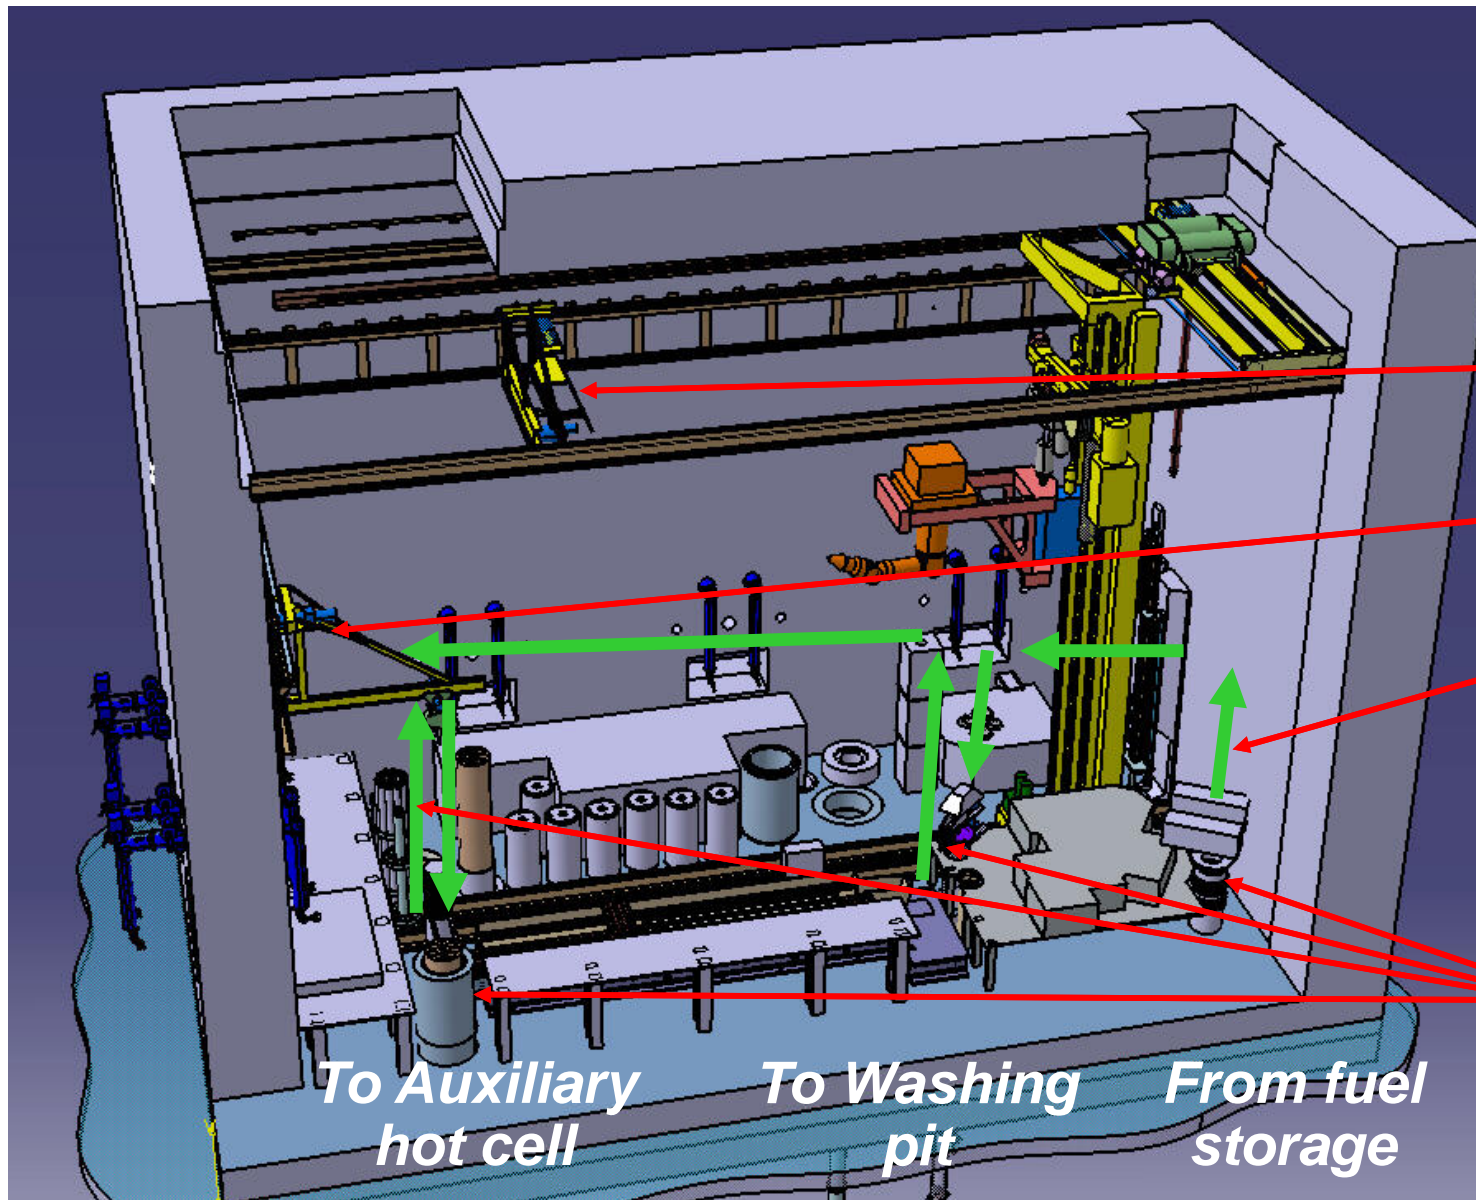

Irradiated fuel elements hot cell

Replacement planned in 2017

West Lifting Unit
Total replacement

South Lifting Unit
Total replacement


Transfer Lifting Unit
Total replacement

Replacement planned in 2016

Link between cells
Refurbishing

Reliability improvement of the evacuation route of fuel elements of Phénix

To Irradiated fuel elements hot cell

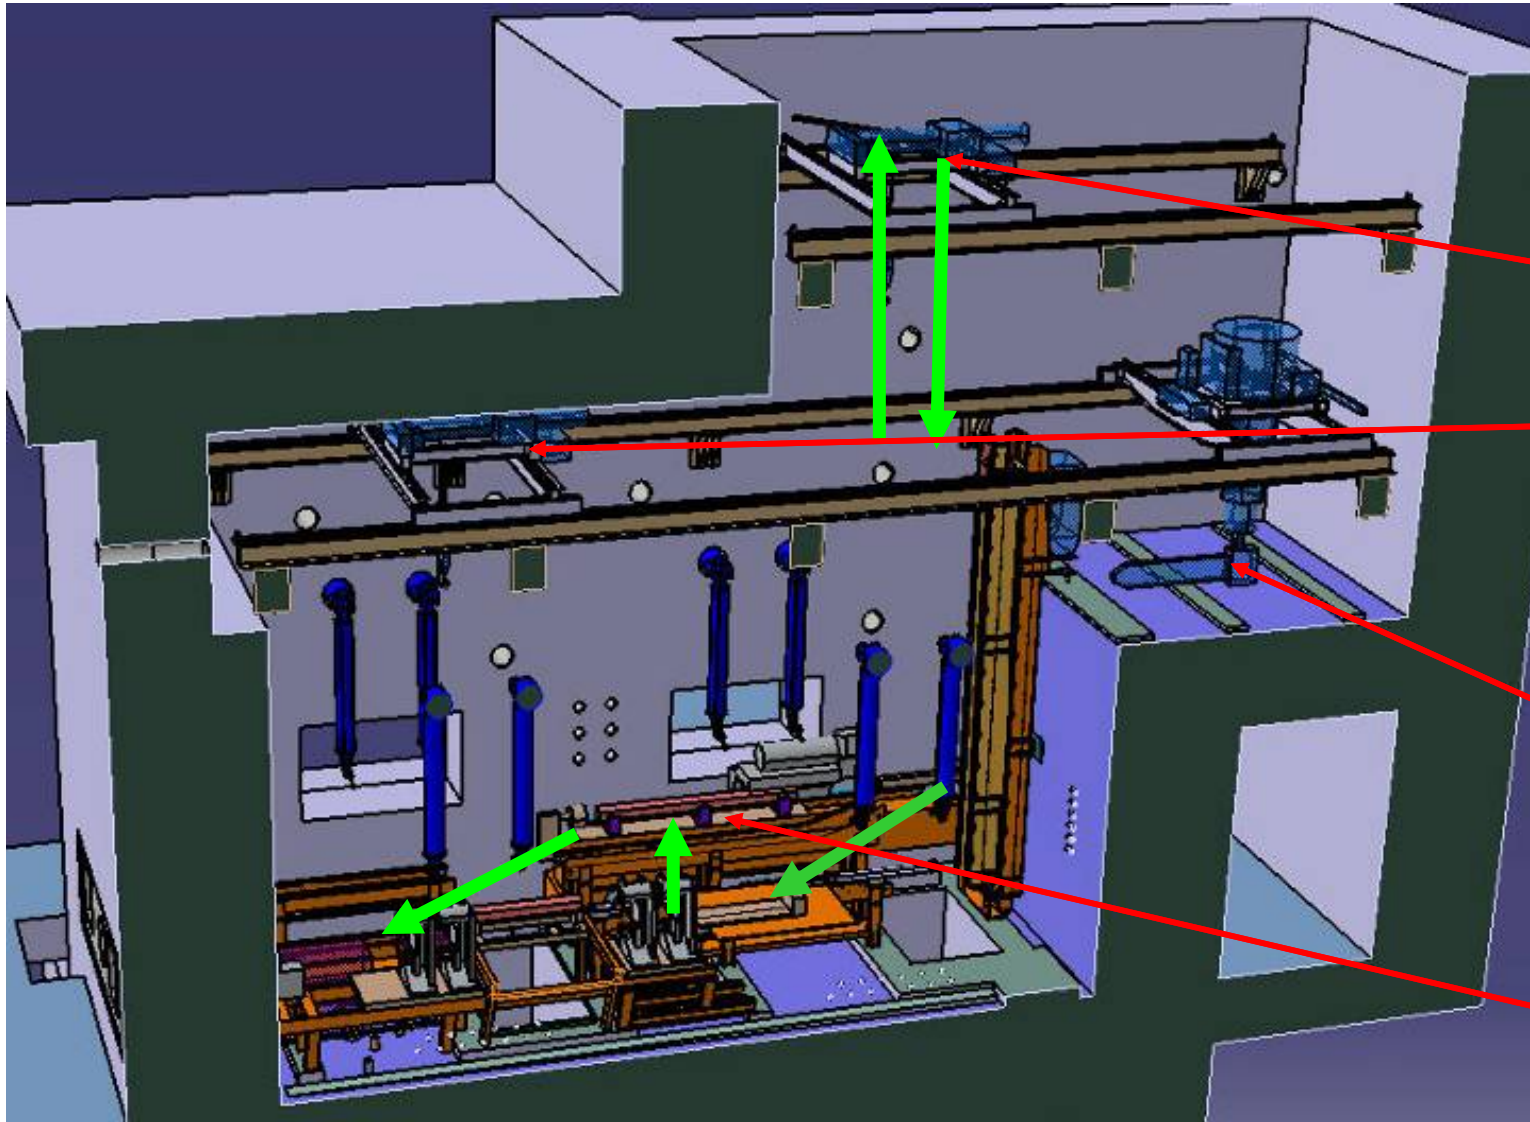

Auxiliary hot cell

Replacement planned in 2017

Top Lifting Unit
Partial replacement

Below Lifting Unit
Partial replacement

Replacement planned in 2018

Heavy Manipulator
Total replacement

Replacement planned in 2016

Milling bench
Important refurbishing

RESULTS

- The second step finished in April 2014.
- The optimization of the maintenance has already started for all equipments even if they will be replaced in a near future.
- The work has started to specify and manufacture the 16 highest-priority equipments.
- The estimated cost for the manufacturing is around 10 M€

CONCLUSION

In parallel to the beginning of evacuation of fuel elements, a project has been launched to increase the reliability of the equipments concerned by the handling route.

The manufacturing is starting and the implementation for the 16 equipments will held during 2016, 2017 and 2018.

Reliability improvement of the evacuation route of fuel elements of Phénix

**Thank you
for your
attention**



Commissariat à l'énergie atomique et aux énergies alternatives
Centre de Marcoule | 30207 Bagnols-sur-Cèze cedex
T. +33 (0)4 66 79 60 00 | F. +33 (0)4 66 79 15 94

Etablissement public à caractère industriel et commercial | RCS Paris B 775 685 019

Direction de l'Energie Nucléaire
DEIM
SOP/GTD